


P.C. LAYOUT

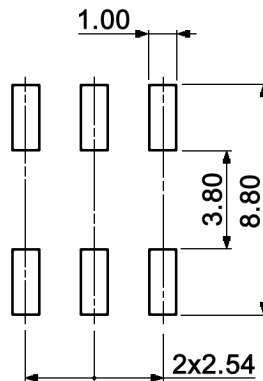

Y	Manufacturing year
8	2008
9	2009
0	2010
1	2011
2	2012

M	Manufacturing month
1	January
...	...
9	September
0	October
N	November
D	December

Specifications:

- Contact rating:** max.: non-switching: 100mA, 50V DC
switching: 30mA, 15V DC
min.: 1µA; 20mV AC or DC
- Contact resistance:** max. 200mOhm at 1.5mA; 0.2mV AC (1kHz)
- Insulation resistance:** min. 1 000MOhm at 100V DC
- Dielectric strength:** 250V AC for 1 minute
- Operating temperature:** -25°C to +75°C
- Storage temperature:** -40°C to +85°C
- Mechanical life:** min. 20 000 cycles
- Operating force:** max. 24.5mN.m
- Material:**
 1-Terminal: phosphor bronze, gold over nickel plated
 2-Base: liquid crystal polymer, black
 3-Frame: stainless steel
 4-Rotor: polyamide resin, white
 Fixed contact: phosphor bronze, gold over nickel plated
 Movable contact: beryllium copper, gold over nickel plated



Tolerances:			Date	Name
			05/07	dr
Date code	03/10	dr		
Modifications	Date	Name		

SMR 13010-J

knitter-switch

30 11 17

Page

1/1