

Hexadecimal inverse

		Complement coded				
		C	1	2	4	8
16 P o s i t i o n s	0	•	•	•	•	•
	1	•		•	•	•
	2	•	•		•	•
	3	•			•	•
	4	•	•	•		•
	5	•		•		•
	6	•	•			•
	7	•				•
	8	•	•	•	•	
	9	•		•	•	
	A	•	•		•	
	B	•			•	
	C	•	•	•		
	D	•		•		
	E	•	•			
	F	•				



Tolerances:	Date	Name	SMR 15116
	10/08	dr	
Soldering conditions	10/09	dr	30 16 19
Material	05/09	dr	
Modifications	Date	Name	knitter-switch

SMR 15116

30 16 19


Page

1/2

Specifications:

Contact rating: non-switching: 400mA, 42V
 switching: 100mA, 42V
Contact resistance: 80mOhm max.
Insulation resistance: 100MOhm min. at 250V DC for 1 minute +/-5sec.
Dielectric strength: 250V DC (50Hz/60Hz) for 1 minute
Operating temperature: -50°C to +125°C
Storage temperature: -55°C to +135°C
Mechanical life: 25 000 cycles
Operating force: 120 +/-30gf/cm
Packaging unit: 1 300 pcs / reel
Material: Cover / spring plate / guide plate: stainless steel
 Contact / terminal: phosphor bronze, min. 0.07µm gold plated
 over min. 0.3µm nickel
 Rotor / base: LCP, UL94V-0
 O-ring: silicone
 Actuator color: ivory

Protection: IP67
Soldering conditions:

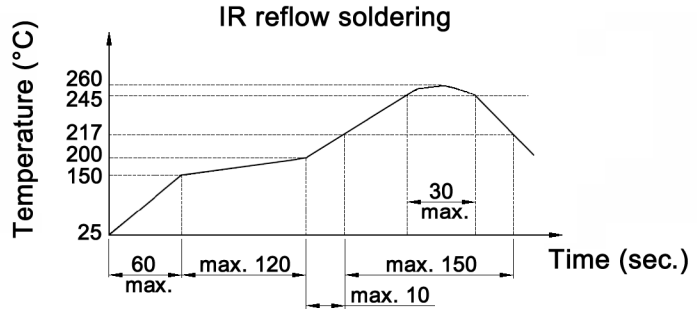

Tolerances:			Date	Name	SMR 15116	30 16 19	Page
			10/08	dr			
			knitter-switch				2/2
Modifications	Date	Name					