


Prod. No.	No. of Pos.	A
SMS 001 N	1	3.95
SMS 002 N	2	6.50
SMS 003 N	3	9.05
SMS 004 N	4	11.60
SMS 005 N	5	14.15
SMS 006 N	6	16.70
SMS 007 N	7	19.25
SMS 008 N	8	21.80
SMS 009 N	9	24.35
SMS 010 N	10	26.90

Specifications:


- Contact rating:** switching: 25mA, 24V DC or 100mA, 6V DC
non-switching: 100mA, 50V DC
- Contact resistance:** 50mOhm max.
- Insulation resistance:** 1 000MOhm min.
- Dielectric strength:** 500V AC (50/60Hz) for 1 minute
- Operating temperature:** -40°C to +100°C
- Storage temperature:** -40°C to +100°C
- Mechanical / electrical life:** 1 000 cycles
- Operating force:** 7N max.
- Material:** Case: PBT, UL94V-0
Slider: PA66, UL94V-0
Contact: copper alloy, 0.3µm gold plated over 1µm nickel
Terminal: copper alloy, 0.2µm gold plated over 2µm nickel
Protective tape: polyimide
- Slider position:** Delivery in OFF position

Soldering conditions:

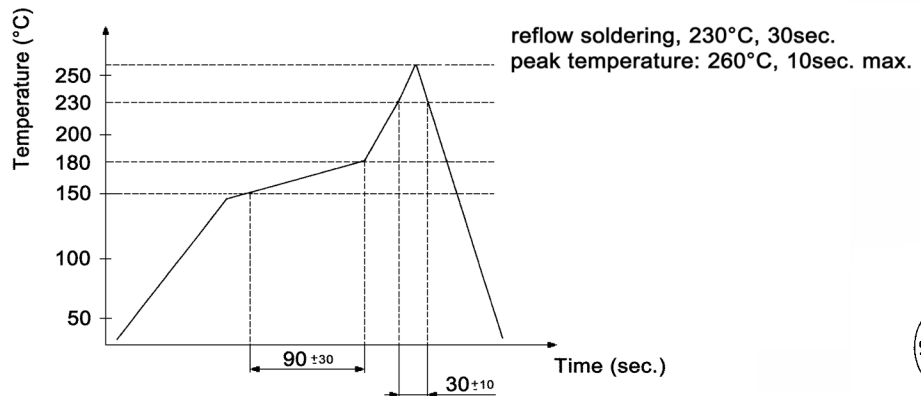


Tolerances: ±0.3mm	Date	Name	<h1>SMS 000 N</h1>
	04/09	dr	
Temperatures	09/09	dr	<h1>30 17 80</h1>
Soldering conditions	05/09	dr	
Modifications	Date	Name	Page 1/2

Packaging: 1 000 pcs. / reel

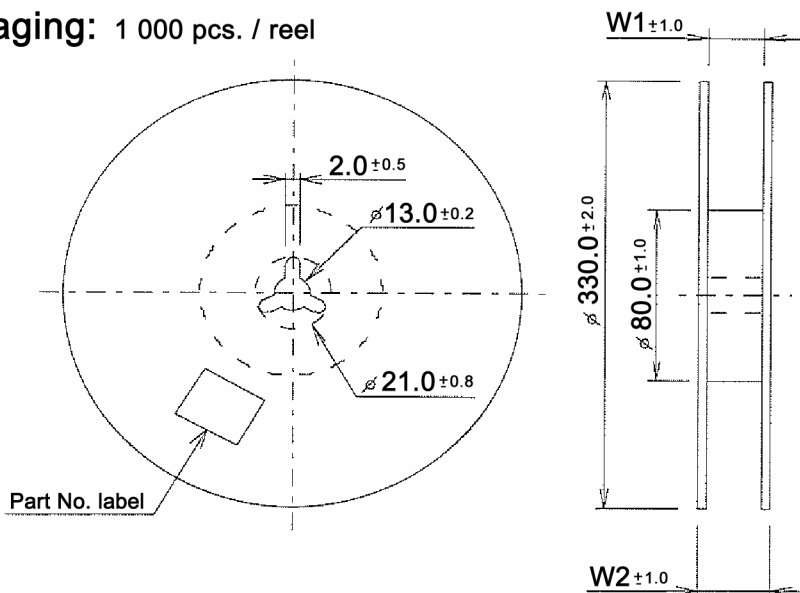


No. of pos.	W1	W2
1	25.4	29.4
2	25.4	29.4
3	25.4	29.4
4	25.4	29.4
5	25.4	29.4
6	25.4	29.4
7	33.4	37.4
8	33.4	37.4
9	45.4	49.4
10	45.4	49.4

Standard type: 1, 2, 3, 4, 5, 6 poles

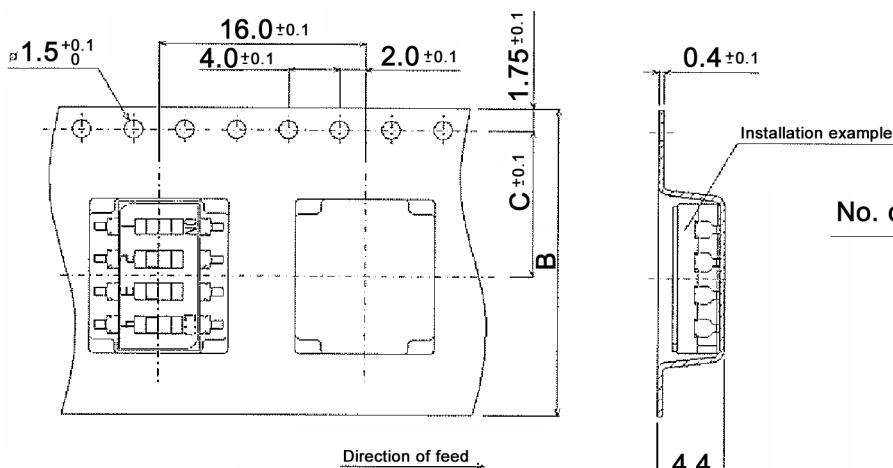

No. of pos.	B	C	D
1	24.0	11.5	-
2	24.0	11.5	-
3	24.0	11.5	-
4	24.0	11.5	-
5	24.0	11.5	-
6	24.0	11.5	-
7	32.0	14.2	28.4
8	32.0	14.2	28.4
9	44.0	20.2	40.4
10	44.0	20.2	40.4

Standard type: 7, 8, 9, 10 poles

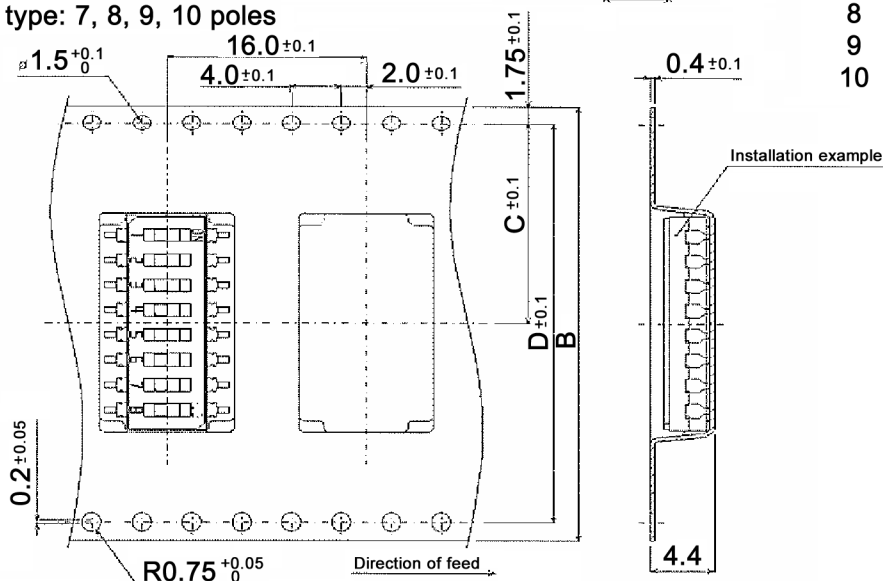

Tolerances: ±0.3mm	Date	Name
	04/09	dr
Modifications	Date	Name

SMS 000 N

30 17 80

Page

2/2

knitter-switch