


P.C. MOUNTING

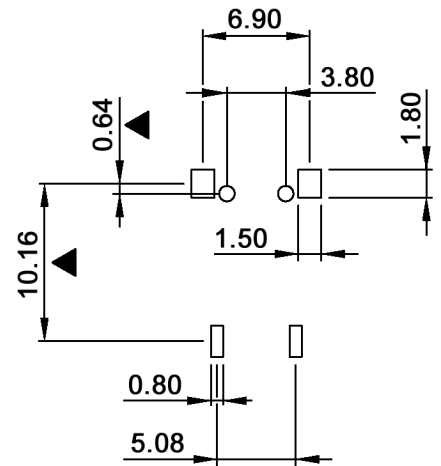

Specifications:

- Contact rating: 0.4VA max.; 20V max. (AC or DC)
- Contact resistance: 20mOhm max. at 2-4V DC
- Insulation resistance: 1 000MOhm min.
- Dielectric strength: 1 000V RMS
- Operating temperature: -30°C to +85°C
- Switching function: off - mom
- Material: Case / bushing: glass filled nylon 4/6, flame retardant, heat stabilized (UL94V-0)
Plunger: thermoplastic polyester (UL94V-0)
Switch support: brass, tin plated
Contact / terminals: gold over silver, tin-lead

Maßstab		Datum	Name	<h1>SSP 1 CT-RP</h1>
Oberfläche		11/05	dr	
		knitter-switch		<h2>30 07 23</h2>
Zust	Änderung	Datum	Name	Blatt 1/1