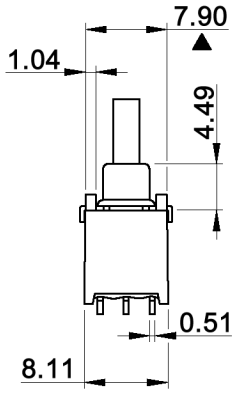

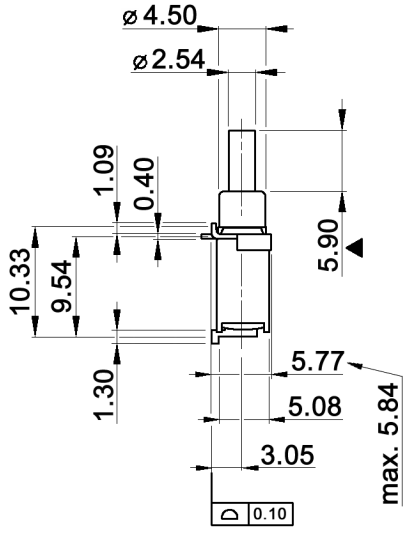

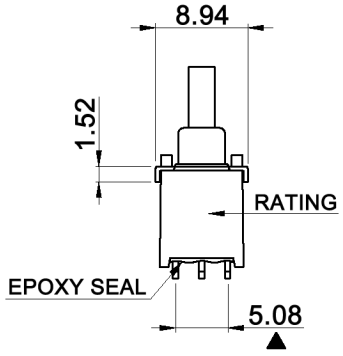



SWITCH FUNCTION

Model No.	POS. 1	POS. 2
SSP 1 FT	ON	MOM
Term. Conn.	2-3	2-1

P.C. MOUNTING

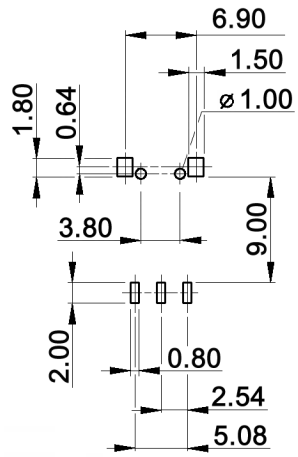

Specifications:

Contact rating:	3A, 120V AC or 28V DC; 1A, 250V AC
Contact resistance:	20mOhm max. at 2-4V DC
Insulation resistance:	1 000MOhm min.
Dielectric strength:	1 000V RMS
Operating temperature:	-30°C to +85°C
Mechanical life:	50 000 make-and-break cycles
Material:	Case / bushing: glass filled nylon 66, flame retardant, heat stabilized (UL94V-0)
	Plunger: thermoplastic polyester (UL94V-0)
	Switch support: brass, tin plated
	Contact: copper alloy, gold over silver
	Terminals: tin plated

RoHS-conform 2002/95/EC

Tolerances: 0.00: ±0.25mm 0.0: ±0.40mm			Date 02/08	Name dr	SSP 1 FT-RP-REV
			knitter-switch	30 13 75	Page 1/1
Dimensions	12/08	dr			
Modifications	Date	Name			