


Specifications:

Contact rating: 0,4VA max.; 20V AC or DC max.
 Contact resistance: 20mOhm max.
 Insulation resistance: 1000MOhm min. / 1000V
 Dielectric strength: 1500V AC (50 or 60Hz / 1 minute)
 Operating temperature: -30 to +85°C
 Mechanical life: 50 000 operations
 Electrical life: 6 000 operations
 Terminal / contact: copper alloy with gold plate over nickel plate
 Operating force: 200grams +/- 50grams
 IP67: According to EN 60529 : 1991 + A1: 2000
 IEC 60529 : 2001

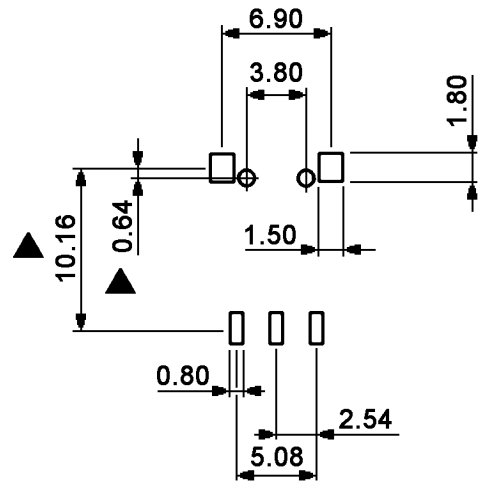

Maßstab		Datum	Name	<h1>SSP1FB-RP</h1>
Oberfläche		12/04	dr	
		knitter-switch		<h2>30 05 31</h2>
Zust	Änderung	Datum	Name	Blatt