



CIRCUIT DIAGRAM




Specifications:

Contact rating: 20mA, 24V DC; max. 0.5W
Contact resistance: 100mOhm max.
Insulation resistance: 1 000MOhm min. at 100V DC
Dielectric strength: 250V, 50Hz for the duration of 1 minute
Operating temperature: -40°C to +85°C
Mechanical life: min. 1 000 000 cycles
Operating force: 4.5 +/-1.0N
Travel: 0.75 +/-0.25mm
Mounting: on pc-board, SMT
Material: Base: thermoplastic UL94V-0, white
 Button: silicone, ivory
 Contact: brass, gold plated
 Terminal: brass, tin plated
 Dome: stainless steel, silver plated

P.C. MOUNTING

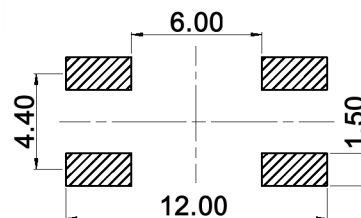

Soldering conditions:

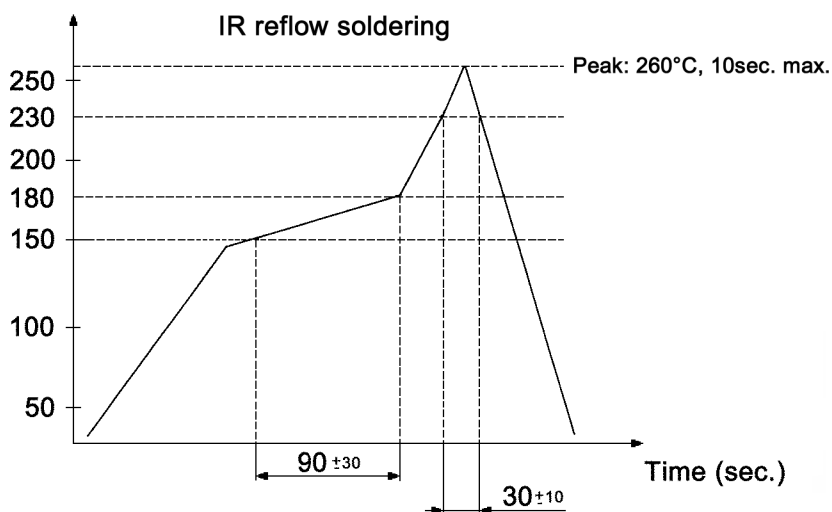

Tolerances: 0.1-1.0: ±0.05mm 1.0-5.0: ±0.1mm 5.0-10.0: ±0.2mm 10.0-20.0: ±0.3mm	Date	Name
	09/08	dr
Packaging	11/11	dr
Base color	07/09	dr
Operating temperature	06/09	dr
Packaging	06/09	dr
Operating force	05/09	dr
Modifications	Date	Name

TMPS 1-1(T)

knitter-switch

30 16 38

Page

1/2

