



SCHEMATIC



Month	Date code 2-digit
Jan	A
Feb	B
Mar	C
Apr	E
May	F
Jun	G
Jul	H
Aug	J
Sep	N
Oct	P
Nov	S
Dec	T

P.C. LAYOUT

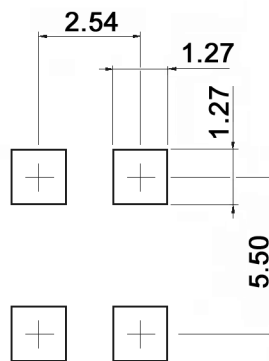

2-digit date code:
 - first digit indicates year of manufacture
 - second digit indicates month of manufacture




Tolerances: ±0.20mm except where noted		Date	Name	<h1>TMSE 10</h1>	
		12/05	dr		
Dimension	11/10	dr		<h1>30 07 49</h1>	
Digit date code	11/09	dr			
Height of case	12/06	dr			
Material	10/06	dr	knitter-switch	<h1>30 07 49</h1>	
Modifications	Date	Name			
				Page	
				1/3	

Specifications:

Contact rating: 24V DC, 100mA max.
Contact resistance: <100mOhm
Insulation resistance: >100MOhm at 500V DC
Dielectric strength: 250V AC, 50Hz for the duration of 1 minute
Operating temperature: -55°C to +125°C
Electrical life: min. 100 000 cycles
Operating force: 3 +/-1N
Contacts: silver plated
Terminals: gold plated
Mounting: on pc-board - SMD
Travel: max. 1.27mm
Material: Cover: stainless steel
 Base: high-temp. thermoplastic nylon meets UL94V-0, washable
 Stem: silicone rubber

Soldering conditions:

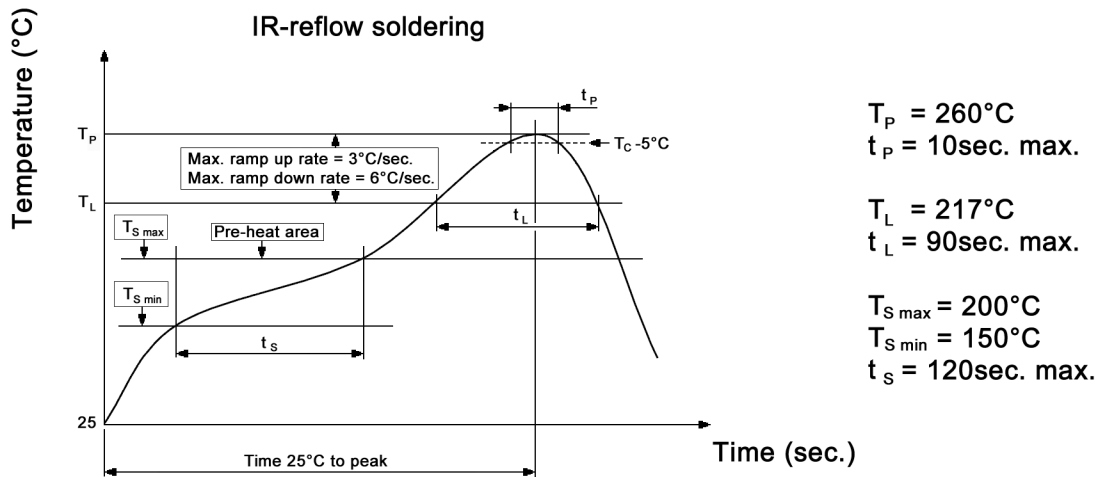

Tolerances: ±0.20mm except where noted			Date	Name	<h1>TMSE 10</h1>
			12/05	dr	
			knitter-switch		<h2>30 07 49</h2>
Modifications			Date	Name	Page 2/3

