



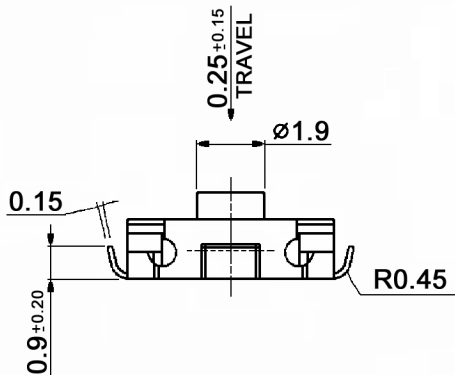


P.C.B. LAYOUT
BOTTOM VIEW

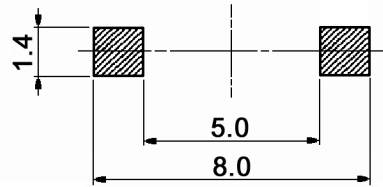

CIRCUIT DIAGRAM



Specifications:

Contact rating: 0.05A, 32V DC
 Contact resistance: 100mOhm max.
 Insulation resistance: 100MOhm min. at 100V DC for 1 minute
 Dielectric strength: 250V AC for 1 minute (50Hz or 60Hz, 2mA)
 Operating temperature: -40°C to +85°C
 Soldering conditions: 260 +/-5°C, 5 +/-1sec.
 Operating force: 300gf +150/-50gf
 Actuator strength: 30N for 1 minute
 Mechanical life: 100 000 cycles
 Packaging: 2500 pcs. / reel
 Material: Terminal: C5191R-EH, Ag
 Case / stem: PA46, black
 Contact plate: SUS, Ag
 Cover: SUS, washing



Tolerances:	Date	Name
		05/06
Actuator strength	05/08	dr
Mechanical life	05/06	dr
Modifications	Date	Name

TSS 309 S-J

knitter-switch

30 08 63

Page

1/1