



P.C.B. LAYOUT

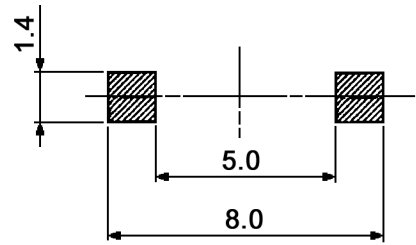

CIRCUIT DIAGRAM



Specifications:

Contact rating: 0.05A; 12V DC
 Contact resistance: 100mOhm max.
 Insulation resistance: 1000MOhm min. at 100V DC for 1 minute
 Dielectric strength: 100V AC for 1 minute (50/60Hz, 2mA)
 Operating temperature: -20°C to +70°C
 Operating force: 300gf +150/-50gf
 Actuator strength: 30N for 1 minute
 Mechanical life: 100 000 cycles
 Soldering heat resistance: reflow soldering: 240°C +/-5°C, 5sec. max.
 Packaging: 2500 pcs./reel
 Material: Terminal: C5191R-EH, Ag
 Case: PA46, black
 Contact plate: SUS, Ag
 Cover: SUS, washing
 Stem: PA46, natural



Tolerances:	Date	Name
	04/06	dr
Actuator strength	05/08	dr
Modifications	Date	Name

TSS 309 S

knitter-switch

30 08 60

Page

1/1