


P.C. MOUNTING



Specifications:

Contact rating: 50mA, 12V DC  
 Contact resistance: 100mOhm max.  
 Insulation resistance: 100MOhm min.  
 Dielectric strength: 250V AC (50/60Hz) for 1 minute  
 Operating temperature: -25°C to +70°C  
 Mechanical life: 500 000 cycles min.  
 Soldering conditions: hand-soldering: max. 3sec. at 350°C  
 Mounting: on PC-board - SMD  
 Travel: 0.45 +/-0.2mm  
 Actuator (A): TSSE 610-R 1.00mm  
 TSSE 623-R 6.35mm

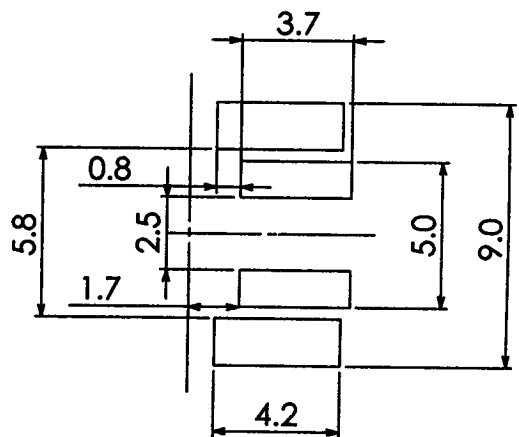

Tolerances:	Date	Name	<b>TSSE 610 R-RA / TSSE 623 R-RA</b>	<b>30 02 30</b>	Page
	02/01	us			
Travel	08/10	dr	<b>30 02 30</b>		1/1
Modifications	Date	Name			