



P.C.B. LAYOUT

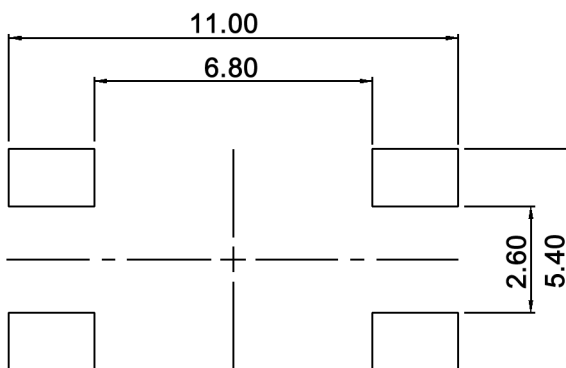

CIRCUIT DIAGRAM

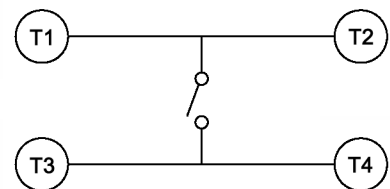

Tolerances: max. ±0.20mm		Date	Name
		06/08	dr
Modifications	Date	Name	

TSSE 64 x

30 15 16

Page


1/2

knitter-switch

Specifications:

Contact rating: 50mA, 12V DC
 Contact resistance: 100mOhm max.
 Insulation resistance: 100MOhm min. at 500V DC for 1 minute +/-5sec.
 Dielectric strength: 250V AC (50/60Hz) for 1 minute
 Operating temperature: -40°C to +85°C
 Storage temperature: -40°C to +90°C
 Mechanical life: 500 000 cycles
 Operating force: see ordering code
 Stroke: 0.45 +/-0.2mm
 Packaging unit: 900 pcs. / reel
 Material: Cover: stainless steel
 Stem and sealing: silicone rubber
 Contact: stainless steel, silver cladding
 Terminal: brass, silver plated
 Base: high-temp. thermoplastic nylon UL94V-0, molded black

Soldering conditions:

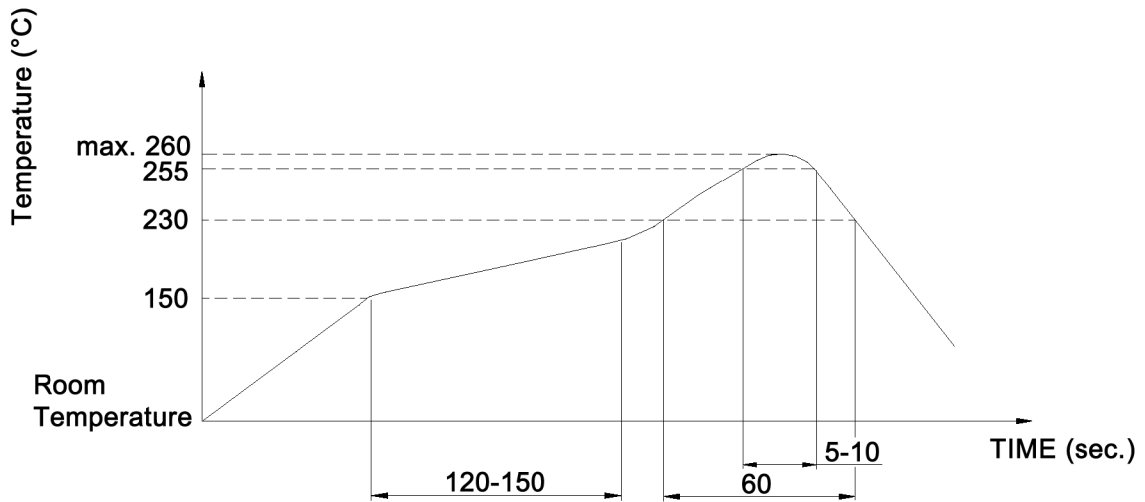

Ordering code:

x	actuation force	stem color
R	260gf +/-70gf	red
N	180gf +/-50gf	brown



Tolerances: max. ±0.20mm			Date	Name	TSSE 64 x
			06/08	dr	
			knitter-switch		30 15 16
Modifications			Date	Name	Page 2/2