


Specifications:

- Contact rating: 50mA, 12V DC
- Maximum power: 1VA
- Maximum voltage: 32V DC
- Minimum voltage: 20mV
- Maximum current: 50mA
- Minimum current: 1mA
- Contact resistance: <100mOhm
- Insulation resistance: >100MOhm at 500V DC
- Dielectric strength: 250V, 50Hz for the duration of 1 minute
- Operating temperature: -40°C to +85°C
- Electrical life: min. 500 000 cycles
- Operating force: 360 +/-90gf, color of actuator: transparent
- Contacts: phosphor bronze, silver plated
- Terminals: brass, silver plated
- Mounting: on pc-board - SMD
- Travel: 0.45mm +/-0.2mm
- Packaging: 1900 pcs./reel
- Material: Cover: stainless steel
Base: high-temp. thermoplastic nylon meets UL94V-0 washable
Stem: silicone rubber

CIRCUIT DIAGRAM

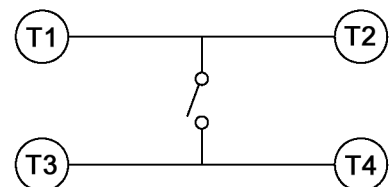

Tolerances:	Date	Name
		02/08
Specifications	01/09	dr
Modifications	Date	Name

TSSE 65 T


30 13 68

Page

1/2

knitter-switch

Soldering conditions:

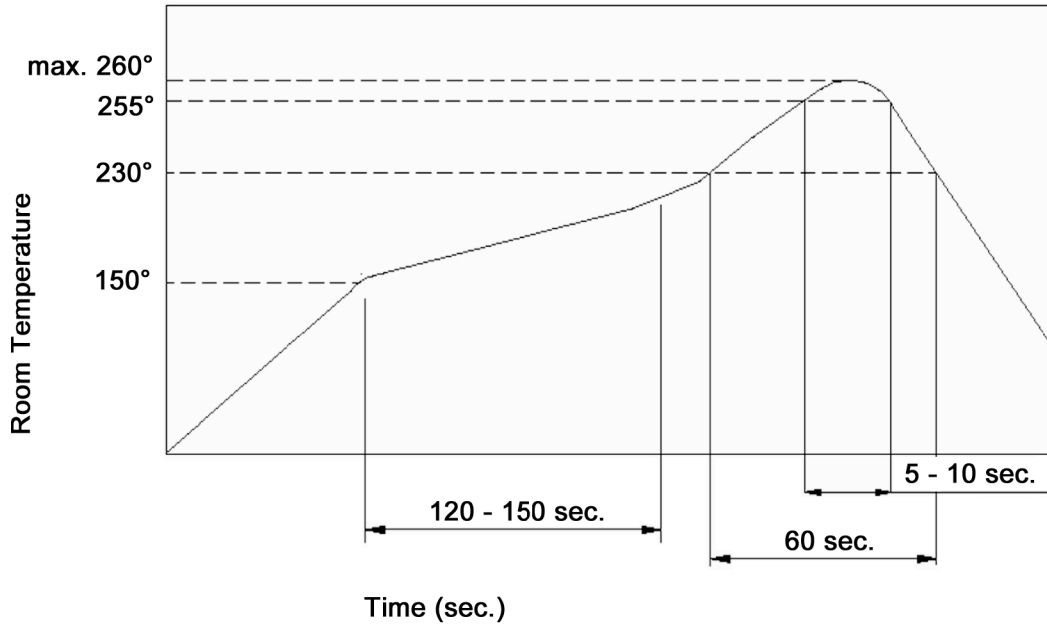

- The condition mentioned above is the temperature on the Cu foil of the P.C.B. surface. There are cases where board's temperature greatly differs from switch's surface temperature depending on board's material, size, thickness, etc. Care, therefore, should be used not to allow switch's surface temperature to exceed 260°C.
- Reflow soldering: 230°C, 60sec. max.
peak temperature: 260°C



Tolerances:			Date	Name	<h1>TSSE 65 T</h1>
			02/08	dr	
			knitter-switch		<h2>30 13 68</h2>
Modifications	Date	Name			Page 2/2