



P.C.B. LAYOUT

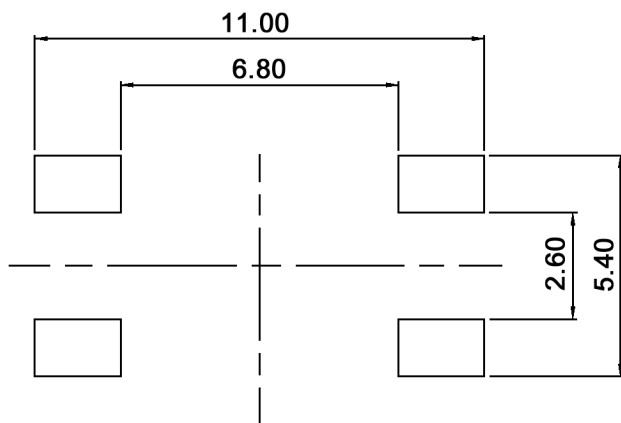

CIRCUIT DIAGRAM

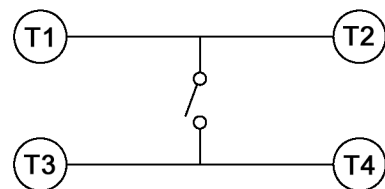

Tolerances: max. ±0.2mm		Date	Name
		04/06	dr
Revised	07/10	dr	knitter-switch
Specifications	01/09	dr	
Modifications	Date	Name	

TSSE 65 xB

30 08 57


Page

1/2

Specifications:

Contact rating: 50mA, 12V DC
 Contact resistance: 100mOhm max.
 Insulation resistance: 100MOhm min. at 500V DC
 Dielectric strength: 250V, 50Hz for the duration of 1 minute
 Operating temperature: -40°C to +85°C
 Electrical life: min. 500 000 cycles
 Mounting: on pc-board - SMD
 Travel: 0.45 +/-0.2mm
 Packaging unit: 1 900 pcs. / reel
 Material: Contacts: phosphor bronze, gold over nickel
 Terminals: brass, gold over nickel
 Cover: stainless steel
 Base: high-temp. thermoplastic nylon meets UL94V-0, washable
 Stem: silicone rubber

Soldering conditions:

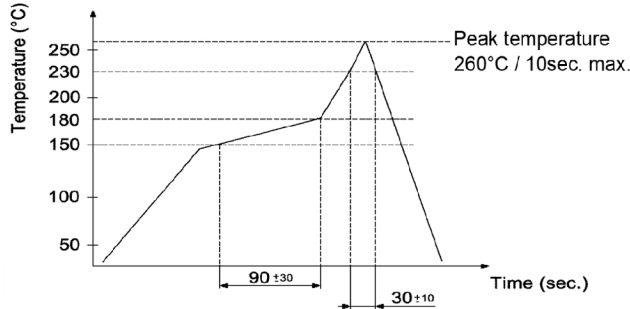

x	Operating force (gf)	Stem colour
N	180 +/-50	brown
R	260 +/-70	red
T	360 +/-90	transparent



Tolerances: max. ±0.2mm			Date	Name	TSSE 65 xB
			04/06	dr	
			knitter-switch		30 08 57
Modifications			Date	Name	Page 2/2