




CIRCUIT DIAGRAM

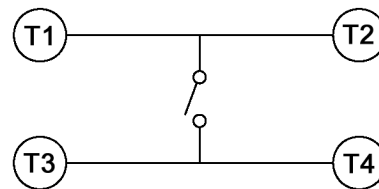

P.C.B. LAYOUT

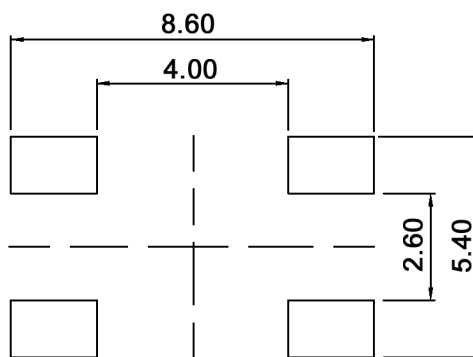

Soldering conditions:

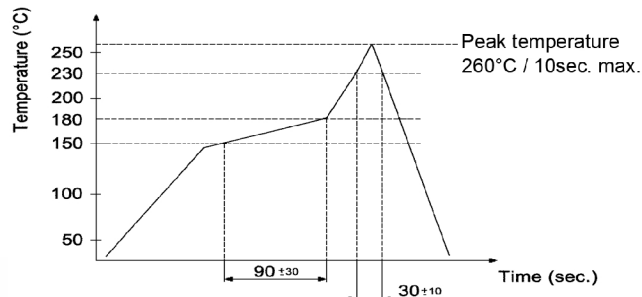

Specifications:

- Contact rating: 50mA, 12V DC
- Contact resistance: 100mOhm max.
- Insulation resistance: 100MOhm min. at 500V DC
- Dielectric strength: 250V, 50Hz for the duration of 1 minute
- Operating temperature: -40°C to +85°C
- Electrical life: min. 100 000 cycles
- Operating force: 1.6N, brown
- Mounting: on pc-board - SMD
- Travel: 0.25mm +0.2/-0.1mm
- Packaging unit: 1 900 pcs / reel
- Material: Contacts: phosphor bronze, gold over nickel
Terminals: brass, gold over nickel
Cover: stainless steel
Base: high-temp. thermoplastic nylon meets UL94V-0, washable
Stem: nylon



| | | |
|-----------------|-------|------|
| Tolerances: | Date | Name |
| | 05/06 | dr |
| | | |
| | | |
| | | |
| Electrical life | 10/09 | dr |
| Specifications | 01/09 | dr |
| Dimensions | 01/09 | dr |
| Modifications | Date | Name |

TSSE 66 NB-J

knitter-switch

30 08 62

Page

1/1