



**P.C.B. LAYOUT**

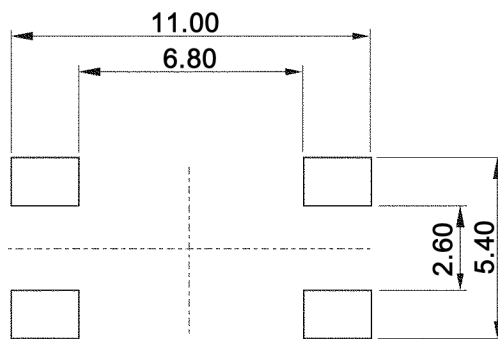

**Soldering conditions:**

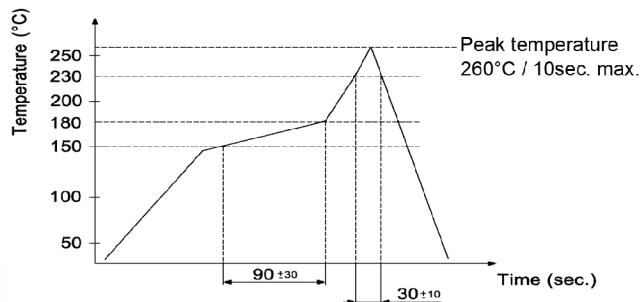

**Specifications:**

- Contact rating: 50mA, 12V DC
- Contact resistance: 100mOhm max.
- Insulation resistance: 100MOhm min. at 500V DC
- Dielectric strength: 250V, 50Hz for the duration of 1 minute
- Operating temperature: -40°C to +85°C
- Electrical life: min. 500 000 cycles
- Operating force: 260gf +/-70gf
- Mounting: on pc-board - SMD
- Packaging unit: 900 pcs. / reel
- Travel: 0.45mm +/-0.2mm
- Switching function: off - mom
- Material: Contacts: phosphor bronze, silver plated  
Terminals: brass, silver plated  
Cover: stainless steel  
Base: high-temp. thermoplastic PA meets UL94V-0, washable  
Stem: silicone rubber



Tolerances:	Date	Name
		1999
Specifications	01/09	dr
Travel	01/05	dr
Modifications	Date	Name

**TSSE 67 R**

**30 01 41**

Page

1/1

**knitter-switch**