



CIRCUIT DIAGRAM



P.C.B. LAYOUT

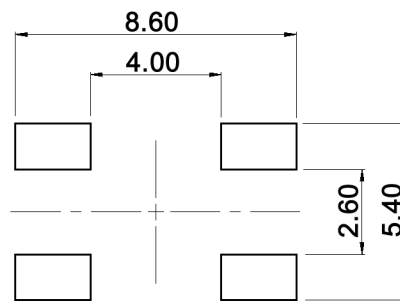

Tolerances: $\pm 0.20\text{mm max.}$			Date	Name
			03/09	dr
Modifications	Date	Name		

**TSSE 67 TB-J**

**knitter-switch**

**30 17 35**


Page

1/2

**Specifications:**

Contact rating: 50mA, 12V DC  
 Contact resistance: 100mOhm max.  
 Insulation resistance: 100MOhm min. at 500V DC  
 Dielectric strength: 250V, 50Hz for the duration of 1 minute  
 Operating temperature: -40°C to +85°C  
 Electrical life: min. 500 000 cycles  
 Operating force: 360 +/-90gf  
 Travel: 0.6 +/-0.2mm  
 Switching function: off - mom  
 Mounting: on PC-board - SMD  
 Packaging unit: 900 pcs. / reel  
 Material: Contacts: phosphor bronze, gold over nickel  
 Terminals: brass, gold over nickel  
 Cover: stainless steel  
 Base: PPA meets UL94V-0  
 Stem: silicon rubber

**Soldering conditions:**

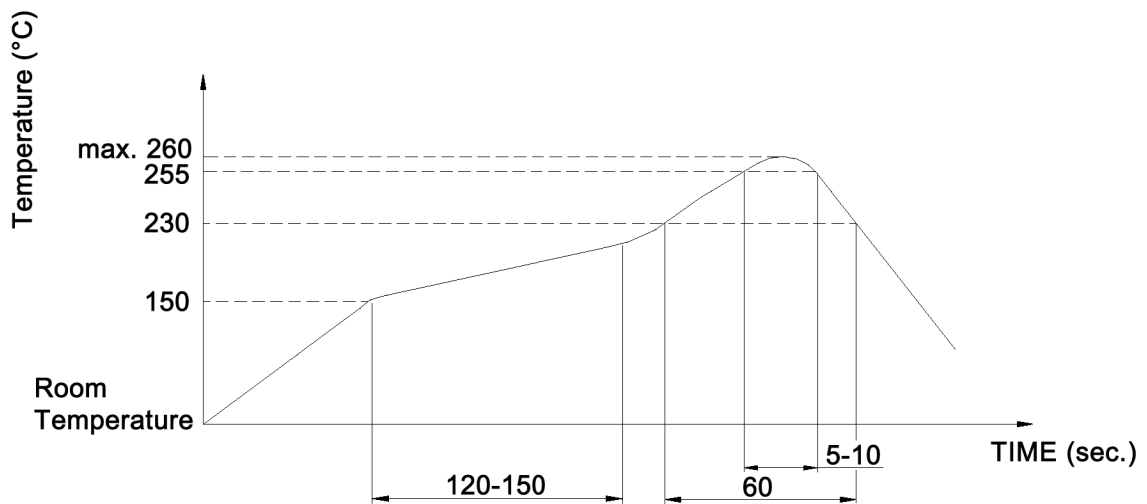

Tolerances: ±0.20mm max.	Date	Name
	03/09	dr
Modifications	Date	Name

**TSSE 67 TB-J**

**knitter-switch**

**30 17 35**

Page

2/2