



P.C.B. LAYOUT

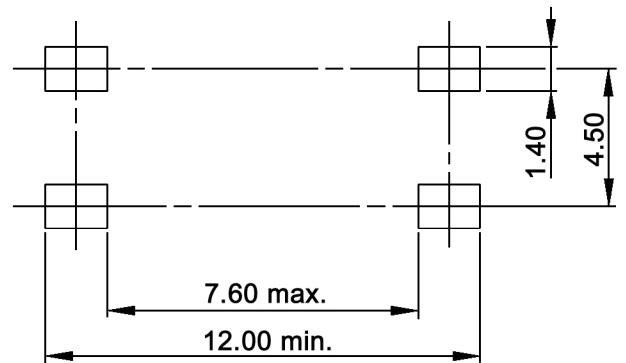

Specifications:

- Contact rating: 100mA, 42V DC/AC max. (0.01mA, 0.02V DC/AC min.)
- Switching power: 1W max.
- Contact resistance: 100mOhm max.
- Insulation resistance: 1 000MOhm
- Dielectric strength: 150V AC (50Hz)
- Operating temperature: -40°C to +80°C
- Mechanical life: 1 000 000 cycles
- Operating force: 3.3 +/-0.6N
- Travel: 0.34 +/-0.1mm
- Packaging unit: 1 000 pcs. / reel
- Material: All plastic material UL94HB
Contact: stainless steel, gold plated over nickel
Terminal: brass, tin over nickel

CIRCUIT DIAGRAM



Tolerances: <10: ±0.2mm 10-30: ±0.3mm	Date	Name
	11/08	dr
Plating	01/11	dr
Modifications	Date	Name

TSSE 8 S


30 16 59

knitter-switch

Page

1/2

Soldering conditions:

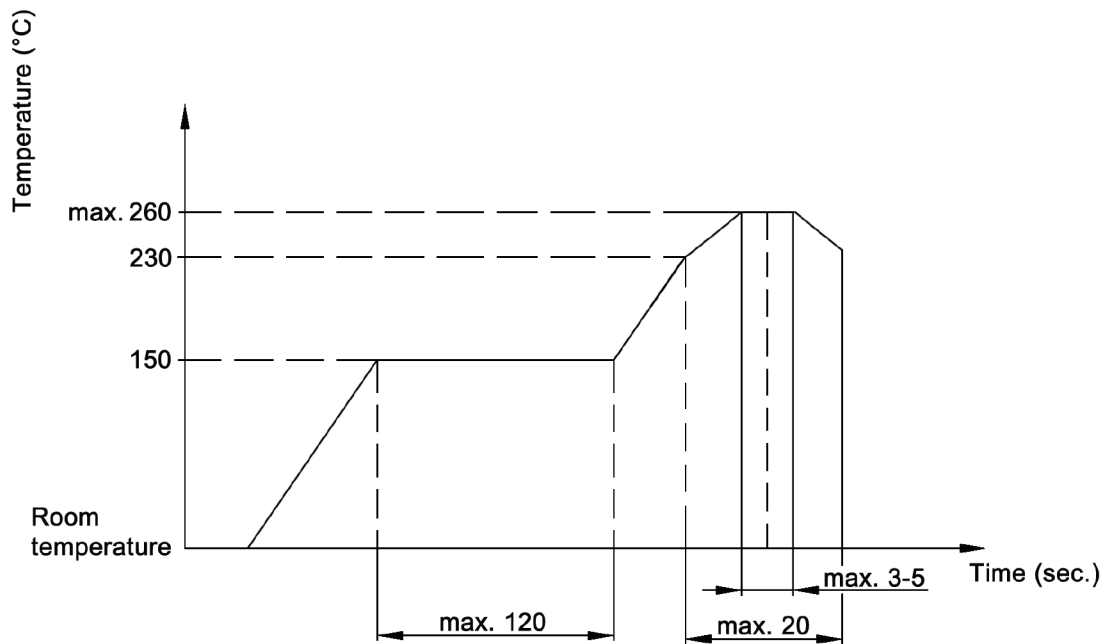

Tolerances: <10: ±0.2mm 10-30: ±0.3mm	Date	Name
	11/08	dr

TSSE 8 S

			knitter-switch
Modifications	Date	Name	

30 16 59