

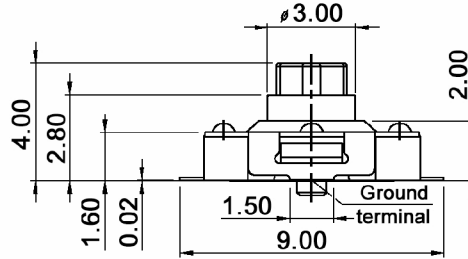

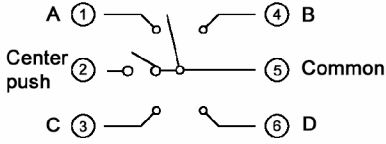




**CIRCUIT DIAGRAM**

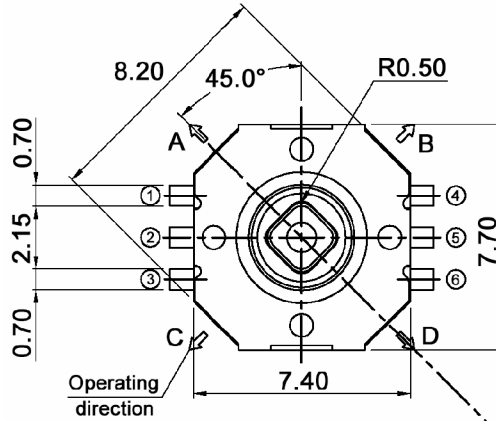

0.90 max.  
Fitting margin  
for key top

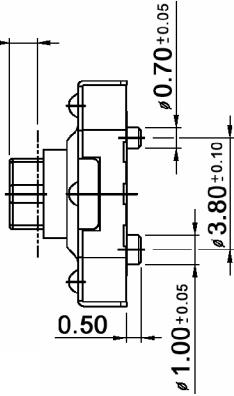

**P.C.B. LAYOUT**

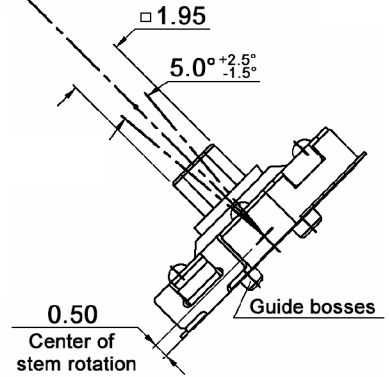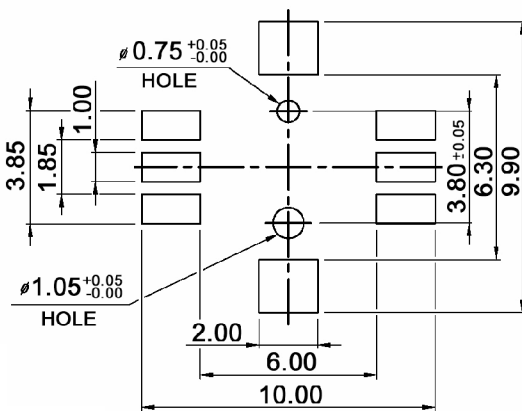

Tolerances: max. ±0.20mm			Date	Name
			08/06	dr
RoHS compliant	10/10	dr	<b>knitter-switch</b>	
Modifications	Date	Name		

**TSSJ 5-4.0**

**30 09 55**

Page

1/2

Specifications:

Contact rating: 50mA, 12V DC  
 Contact resistance: 100mOhm max.  
 Insulation resistance: 100MOhm min.  
 Dielectric strength: 250V AC (50 or 60 Hz) for 1 minute  
 Operating temperature: -20°C to +70°C  
 Storage temperature: -40°C to +85°C  
 Operating force: center: 320 +/-50g; 4 directions: 160 +/-50g  
 Mechanical life: 100 000 cycles min.  
 Soldering temperature: peak 255°C / max. 10sec., >250°C  
 Material: Cover: C7701RH  
 Stem: high-temp. thermoplastic LCP  
 Contact: SUS301CSP-EH  
 Terminal: C5210R-H, with silver plated  
 Base: high-temp. thermoplastic LCP, black



Tolerances: max. ±0.20mm			Date	Name	<h1>TSSJ 5-4.0</h1>
			08/06	dr	
			<b>knitter-switch</b>		<h2>30 09 55</h2>
					Page
					2/2
Modifications	Date	Name			