


**Specification:**

Contact rating: max. 20 V AC/DC, 0,4 VA  
 Contact resistance: < 20 mOhm  
 Insulation resistance: > 1000 MOhm  
 Dielectric strenght: 1000V, 50 Hz for the duration of 1 minute  
 Operating temperature: -30° to + 85°C  
 Mechanical life: minimum 30 000 cycles  
 Contacts/Terminals: copper alloy, gold-plated over nickel  
 Material: case nylon with glass fibre, meets UL 94 V-0, washable  
 support: brass, tin-plated  
 lever: brass, chromium-plated  
 on pc-board

Mounting: on - on

**Soldering conditions:**

1) reflow soldering

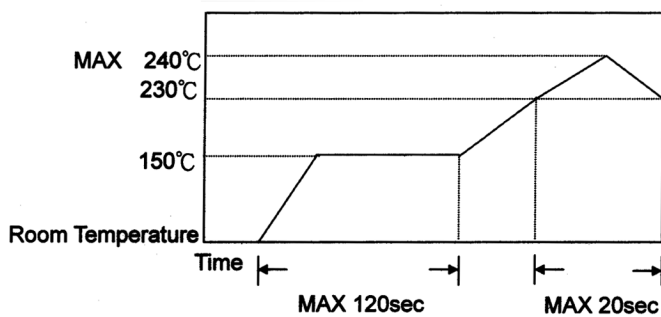

2) auto-soldering: 260°C max., 5 sec. max.

Maßstab		Datum		Name		TST 1 D-RA-1
Oberfläche		Bearb.	05/03	us		
		Gepr.				
		Norm				
		<b>knitter-switch</b>			30 03 69	
Zust.	Änderung	Datum	Name		Blatt 1/1	
						Bl.