


Sealed Sub-Miniature Toggle Switches

SPECIFICATIONS

CONTACT RATING: 0.4 VA max. @ 20 VAC or DC max.
 ELECTRICAL LIFE: 50,000 make-and-break cycles at full load
 CONTACT RESISTANCE: Below 20 milliohms typ. initial @ 2-4 V DC,
 100 mA, for both silver and gold plated contacts.
 INSULATION RESISTANCE: 10^9 ohms min.
 DIELECTRIC STRENGTH: 1000 V RMS min. @ sea level.
 OPERATING TEMPERATURE: -30 °C to 85 °C.

MATERIALS

CASE & BUSHING: Glass filled nylon 6/6, flame retardant, heat stabilized (UL 94V-0).
 All other actuators-brass, chrome plated. Internal o-ring seal standard with all actuators.
 SWITCH SUPPORT: Brass, tin plated.
 CONTACTS & TERMINALS: Copper alloy, with gold plate over nickel plate.
 TERMINAL SEAL: Epoxy.

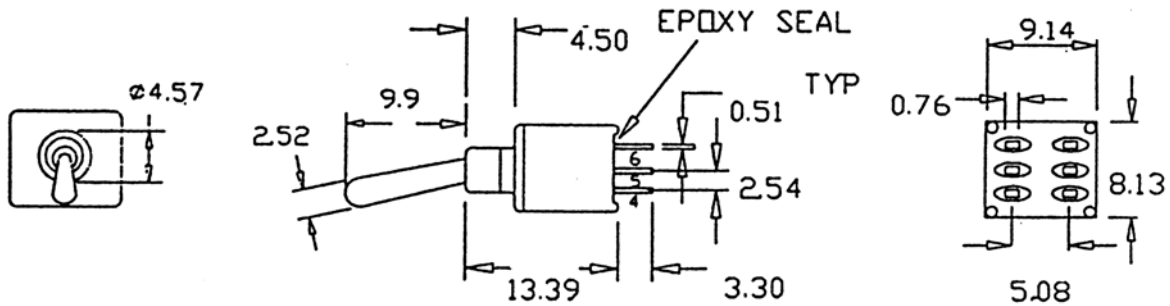

Switching Position		
ON	NONE	ON
ON	NONE	(ON)
ON	OFF	ON
2-3,5-6	OPEN	2-1,5-4

Schematic

02 Comm. 050 Comm.
 1/3 • 2/6 •

Delivery or reproduction of this document, and the use of any information contained therein, are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of a Patent or the registration of a Utility Model.

Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patenterteilung oder G.M.-Eintragung vorbehalten.

		09/36 StF		TST 2N	
				30 01 10	
Tag	Ausgabe	Mitteilung	Name	Blatt	
TR		Freigabe:		Blätter	