Subminiature Toggle Switches for SMT

Specifications:

Contact rating:	max. 20 V AC/DC, 0,4 VA
Contact resistance:	< 20 mΩ
Insulation resistance:	> 1000 MΩ
Dielectric strength:	1000 V RMS at sea level
Operating temperature:	– 30° to + 85° C
Electrical life:	50 000 operations at full load
Contacts:	copper alloy, with gold plate over nickel plate
Terminals:	copper alloy, with tinlead alloy over nickel plate
Material:	case and bushing: glass filled nylon 6/6 (UL 94 V–0)
	actuator: brass, chromium-plated
	switch support: brass, tin-plated
	base and stem: thermoplastic nylon meets UL 94 V–0; caps ABS
Mounting:	on pc-board – SMD

washable

Model:	Switching function	
SST 1 DT-R	on – on	

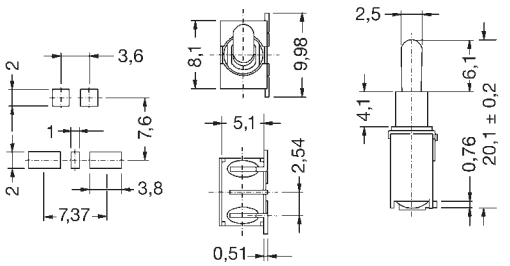
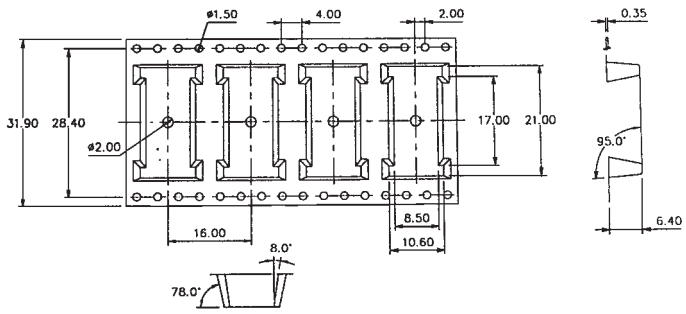
Packaging:
500 pcs/reel